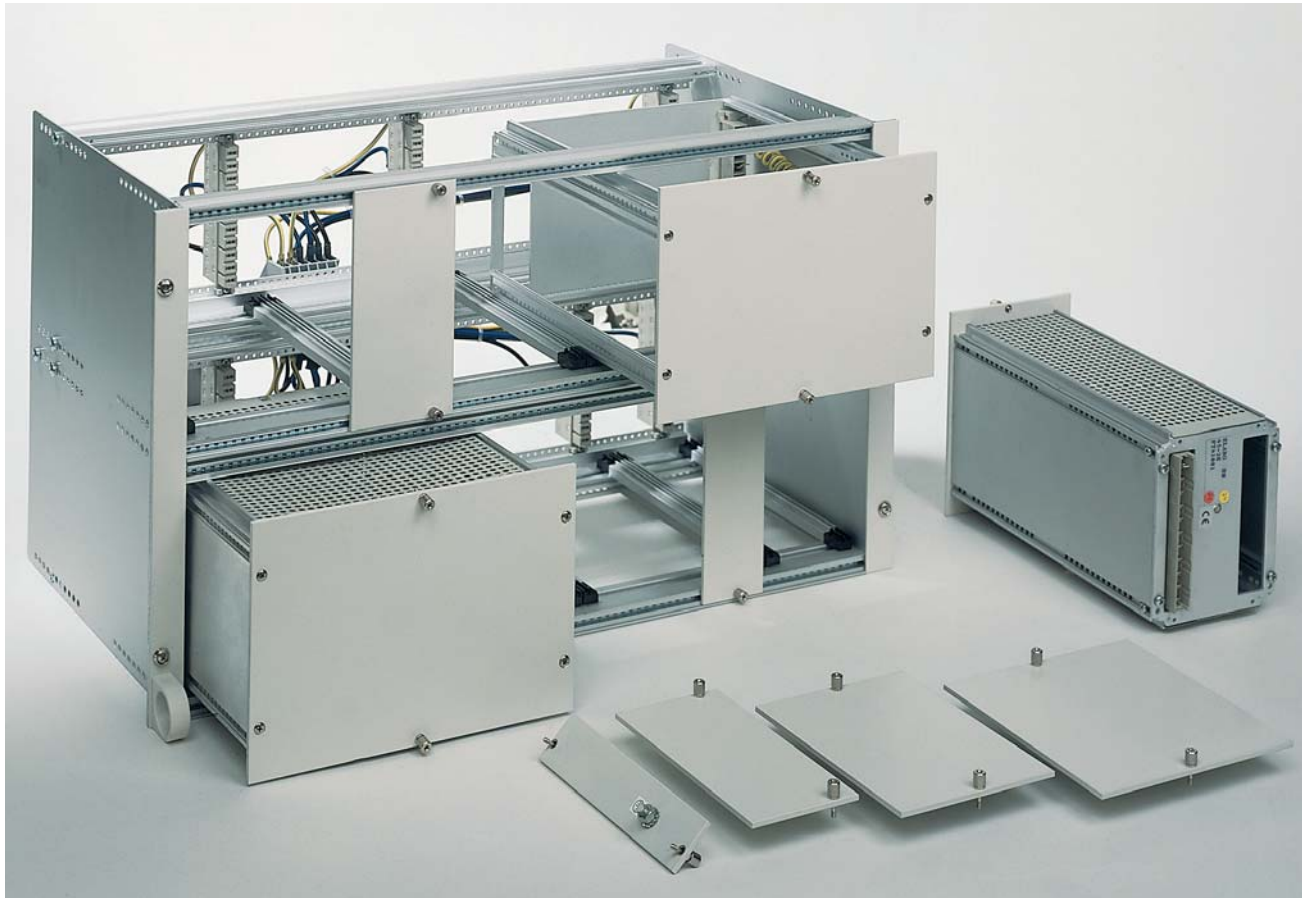


## 8.21 Blank plate, housing, cassette

# Blank plate, empty eurocassette



## Blank plates:

Blank plates in the system eurocassettes fill remaining space in the desktop rack. They are comprised of 3mm thick hard aluminium with an epoxy resin powder coating, colour: light grey.

Undetachable Philips head screws are mounted above and below for fastening in the rack mount or in the housing.

The height of all of the plates is 128.5mm = 3HU.

## Empty eurocassettes, open version:

The eurocassettes are shipped without lateral and upper or lower covers.

The front plates correspond in their design to the blank plates. The depth profiles are comprised of an extruded aluminium strand profile. The rear wall is made of 2mm aluminium and provided with a punch-out for male multipoint connectors in accordance with DIN 41612.

Empty eurocassettes are always shipped with an 11-pin male and female multipoint connector with high-current contacts and a pair of guide rails.

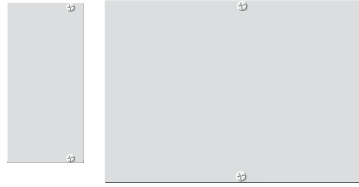
Height: 128.5mm = 3HU  
Depth: 196mm

## Empty eurocassettes, closed version:

Version as above, but with closed sides, upper and lower covering. The upper or lower cover is perforated.

Height: 128.5mm = 3HU  
Depth: 196mm

# Blank plate, empty eurocassette



Blank plates are comprised of 3mm thick hard aluminium, powder-coated in light grey on both sides (similar to RAL 7035). Special undetachable Philips screws are mounted for fastening purposes which can also be used for dismantling purposes. An earthing bolt size M5 is welded to the rear side of the blank plate. Uniform front plate height 3HU = 128.5mm.

3HU / 4HP	20,3mm wide	40-1H
3HU / 6HP	30,4mm wide	40-1G
3HU / 8HP	40,3mm wide	40-1J
3HU / 12 HP	60,9mm wide	40-1A
3HU / 18HP	91,4mm wide	40-1B
3HU / 24HP	121,9mm wide	40-1C
3HU / 36HP	182,9mm wide	40-1D
3HU / 42HP	213,3mm wide	40-1E
3HU / 48HP	243,8mm wide	40-1F
3HU / 60HP	304,8mm wide	40-1K
3HU / 96HP	487,6mm wide	40-1L



Empty eurocassettes, open version

In addition to the front plate, empty eurocassettes contain an additional 4 depth profiles comprised of an extruded aluminium stand profile, a 2 mm thick aluminium rear wall with punch-out for one male multipoint connector in accordance with DIN 41612. Empty eurocassettes are shipped with 11-pin male and female multipoint connector and a pair of guide rails. Eurocassette depth is a uniform 196 mm.

3HU / 12HP	60,9mm wide	40-2A
3HU / 18HP	91,4mm wide	40-2B
3HU / 24HP	121,9mm wide	40-2C
3HU / 36HP	182,9mm wide	40-2D
3HU / 42HP	213,3mm wide	40-2E
3HU / 48HP	243,8mm wide	40-2F

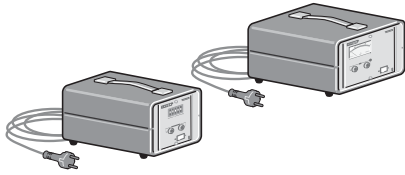
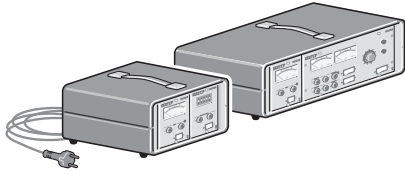


Empty eurocassettes, closed version

Closed empty eurocassettes are equipped with a closed aluminium side wall profile. The upper and lower covering is provided by a perforated aluminium sheet which is supported in removable fashion in the side wall profile.

3HU / 12HP	60,9mm wide	40-3A
3HU / 18HP	91,4mm wide	40-3B
3HU / 24HP	121,9mm wide	40-3C
2HU / 36HP	182,9mm wide	40-3D
3HU / 42HP	213,3mm wide	40-3E
3HU / 48HP	243,8mm wide	40-3F

# Housing

	Technical data	Order no.
Support housing	Aluminium housing 3HU 1 connection cable, 1-phase, with Schuko plug Colour: light grey	
	with space for 24HP W = 170mm, D = 285mm, H = 150mm	30-6L
	with space for 36HP W = 230mm, D = 285mm, H = 150mm	30-6M
Support housing	Aluminium housing 3HU 1 connection cable, 1-phase, with Schuko plug Colour: light grey	
	with space for 42HP W = 260mm, D = 285mm, H = 150mm	30-6P
	with space for 84HP W = 475mm, D = 285mm, H = 150mm	30-6N
	with space for 84HP, with wiring for PE and IS testing equipment W = 475mm, D = 285mm, H = 150mm	30-6R



The aluminium shell housing enables the mobile utilisation of Elabo 3HU eurocassettes. Aluminium traverse profiles are mounted inside with M 2.5 threads at the front and the rear in 5.08mm separation grids in accordance with DIN 41494. A female multipoint connector with 11 high-current contacts serves as the insert mating connector.

The 3HU housing can be loaded in the specified horizontal pitches (1HP = 5.08mm) with eurocassettes. The version is completely wired with 4 housing feet, carrying grip and 2.5m of connection cable with Schuko plug.

Rack mounts for 6HU racks can be found on page 157. Accessories for eurocassettes and rack mounts for all systems can be found on page 169.


# Blank plate, rack insert

Blank panel insert plate  
6HU / 1WU



31-1A

Blank panel insert plate  
6HU / 2WU



31-1B

Blank panel insert plate  
6HU / 4WU



31-1C

Blank panel insert  
6HU / 2WU

31-2B

Blank panel insert  
6HU / 4WU

31-2C

Rack insert  
6HU / 4WU





31-2F

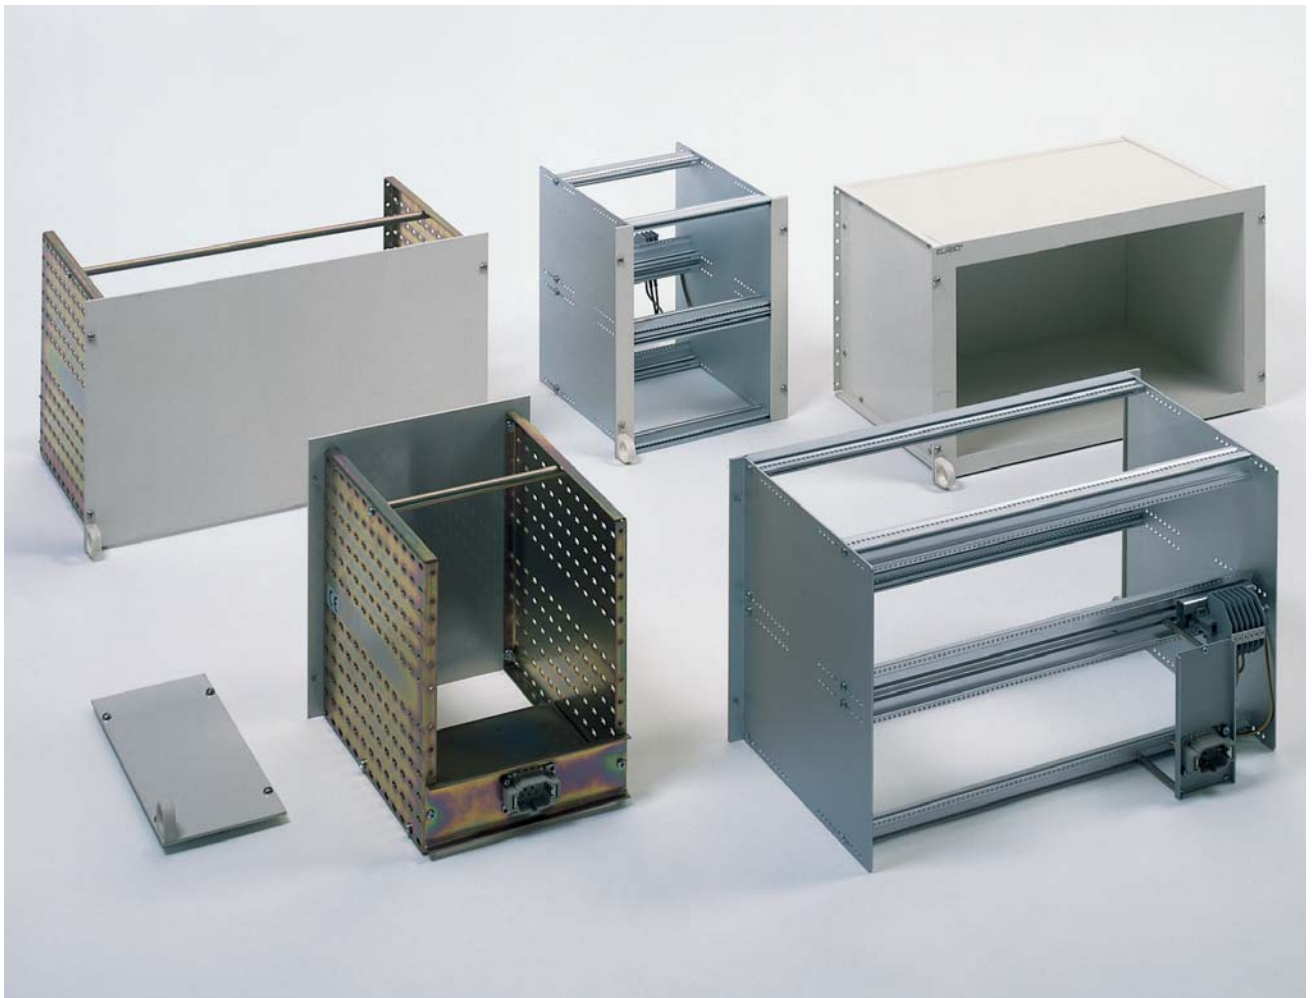
Rack insert  
6HU / 6WU



31-2G


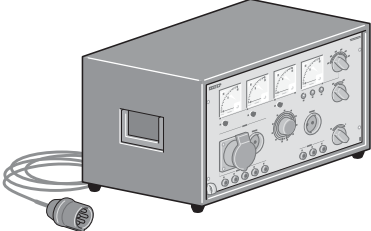
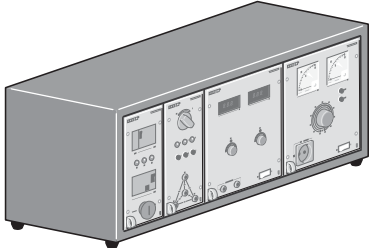
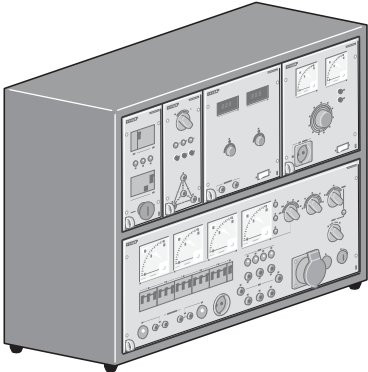
# Rack mount

	Technical data	Order no.
<p>Blank panel insert plate 6HU / 2WU</p> 	<p>Rack mount for holding euroboards or eurocassettes 3HU / 2 x 36HP</p>	<p>31-4A</p>
<p>Blank panel insert plate 6HU / 4WU</p> 	<p>Rack mount for holding euroboards or eurocassettes 3HU / 2 x 84HP</p>	<p>31-4B</p>



# Housing

Housings made of steel plating are powder-coated in light grey and sometimes equipped with two fold-away side handles and four robust rubber feet. The rack-and-panel-type connector is mounted on the interior side of the perforated rear wall of the housing. Version complete with guide rails and 2 m connection cable with strain relief.

	Technical Data	Order no.
<p>Individual housing</p> 	<p>Housing made of steel plating with space for 2WU with 2 carrying grips and 4 rubber feet Connection cable with Schuko plug W = 247mm, D = 340mm, H = 300mm</p> <p>Connection cable with Cekon plug for 3-phase alternating current W = 247mm, D = 340mm, H = 300mm</p>	<p>30-6A Z01</p> <p>30-6A Z03</p>
<p>Individual housing</p> 	<p>Housing made of steel plating with space for 4WU with 2 carrying grips and 4 rubber feet Connection cable with Schuko plug W = 483mm, D = 340mm, H = 300mm</p> <p>Connection cable with Cekon plug for 3-phase alternating current W = 483mm, D = 340mm, H = 300mm</p>	<p>30-6C Z01</p> <p>30-6C Z03</p>
<p>Multiple housing</p> 	<p>Housing made of steel plating with space for 6WU, 4 rubber feet Connection cable with Schuko plug W = 755mm, D= 315mm, H = 320mm</p> <p>Connection cable with Cekon plug for 3-phase alternating current W = 755mm, D= 315mm, H = 320mm</p>	<p>30-5A Z01</p> <p>30-5A Z03</p>
<p>Multiple housing</p> 	<p>Housing made of steel plating with space for 2 x 6WU, 4 rubber feet Connection cable with Schuko plug W = 755mm, D= 315mm, H = 320mm</p> <p>Connection cable with Cekon plug for 3-phase alternating current W = 755mm, D= 315mm, H = 320mm</p>	<p>30-5B Z01</p> <p>30-5B Z03</p>