



Energy consumption

The aim of Elabo lighting systems are maximum reliability with minimum consumption. For this reason, compact fluorescent bulbs are used with electronic ballasts. In addition, Elabo is the first provider in the field of electrical laboratories to offer its own LED lamp designs.

Variability

Elabo provides numerous different solutions for optimum work station lighting.

1. Lamps attached directly to the rack
 - LED work station lamps
 - Lamp terminals with fluorescent lamps

2. Lamps attached directly to the profile
 - Multifunctional lamps
 - Compact work station lamps
 - Master lamps

3. Lamps attached to the table
 - LED magnifying lamps
 - Lamps with swivel sleeve adapter for fastening to the table

Note

The lamp terminals and one workstation lamp are described in the InForm racks chapter. All other lamps are listed under Lighting accessories and Adaptation technology accessories.

Saving energy

Elabo brings light to the table. And not only that! With two solutions from the LED range, energy can now also be saved in the electrical laboratory. The low power consumption ensures that as a whole only approximately half of the power is required in comparison with conventional comparable workstation illumination with commercially available illuminants. Furthermore, the LED lamps have a much longer service life: they will provide around 50,000 working hours of light. This corresponds to approximately 6 years of non-stop light and 100% illumination power without maintenance costs.

Mountable

The LED lamps are not only quick and easy to mount, but they can also be mounted in a variety of positions. This ensures that the work station is always optimally lit.

Pivotable

With their lockable spherical heads, LED lamps can also be swivelled in all directions and locked into place.



Installation options



LED lamps



Technical data

LED work station lamps
 2 x 8 W inc. power supply unit

 2 lighting tubes with lockable spherical heads
 1 power supply unit 230 V / 12 V
 1 power cable with switch

 Illumination intensity 1500 lux per lamp
 Colour temperature cold white 6000 K

Width	Depth	Height	Order no.
			75-9A

75-9A

Energy-saving magnification

With the LED ring magnifier lamp, an object can be enlarged and illuminated at the same time with pinpoint accuracy. A distortion-free Eschenbach plastic lens with a diameter of 70 mm and a magnification of 5.3 dioptries enlarges the test sample by a factor of 2.3.

Fire prevention

A high-quality protective lens cover with a quick fastener ensures that sunlight falling on the lens when it is not being used will not cause a fire.

Adaptable

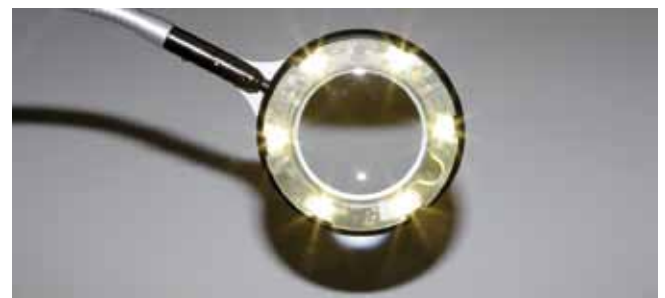
There are numerous individual methods of attachment to the Elabo work station using the ring LED's attachment pintle.

Sensor controlled

A Soft-Touch sensor was specially developed for this lamp and integrated in the lamp head. A gentle touch is sufficient to switch the magnifying lamp on or off. In addition, continuous pressure causes a dimming of the light.

Flexible application

Thanks to its high-quality, robust design, the lamp can be utilised in practically any area. Both the lamp head and the stand pipe and the flexible hose are thus examples of robust materials; LED and circuit board are insensitive to vibration.



LED magnifying lamp



Technical data	Width	Depth	Height	Order no.
LED magnifying lamp inc. power supply unit 1 x LED module 4 W; neutral white dimnable				85-1E
Clamp adapter for magnifying lamp 0-65 mm				85-1F
Rotary adapter for installation on the InForm profile, diameter 16 mm				78-4E

Directive

Humans receive 80% of all information through their eyes; it is for that reason that the sight conditions at the workplace are exceptionally important. Essential specifications concerning illumination in rooms or with certain activities are listed in the workplace regulation (ASR 7/3, DIN 5035).

In the case of direct lighting, for example, 700 lux should be available at desks.

Recommended values:

- 1500 lux watchmaker's work station
- 1000 lux electronics assembly area
- 500 lux monitor area

Technical details

The integrated, high-power, multifunctional lamp mounted above the tabletop fulfils all conditions for high visibility requirements, without any distracting glare.

Illuminating power:

2 x 58 W, 2 x 36 W or 2 x 30 W depending on table width.

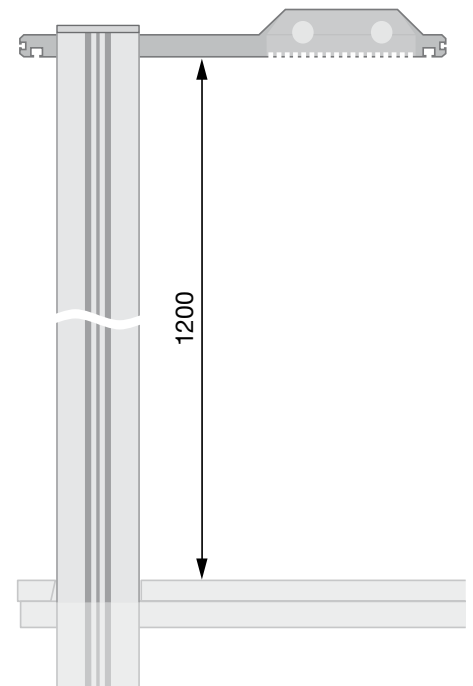
The compact fluorescent lamps save energy: Elabo uses electronic ballasts.




Slide rails





The longitudinal system profile on the multifunctional lamp simultaneously serves as a slide rail which can hold a slide on which to hang balancers. The slide can be moved along the entire width of the bench. A maintenance unit can also be installed on the system profile for operating pneumatic screwdrivers.


Order note

For mounting the multifunction lamp, additional vertical profiles are required. Multifunction lamps are supplied fully-assembled with vertical profiles.



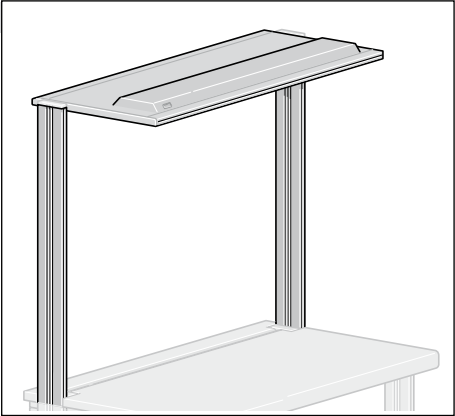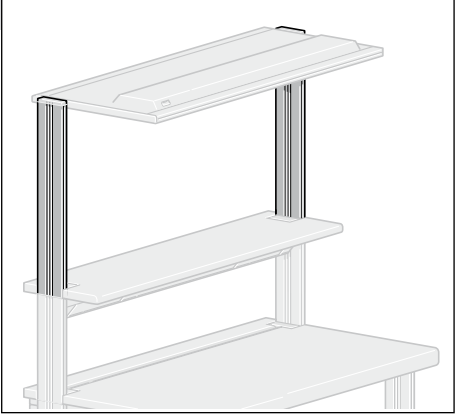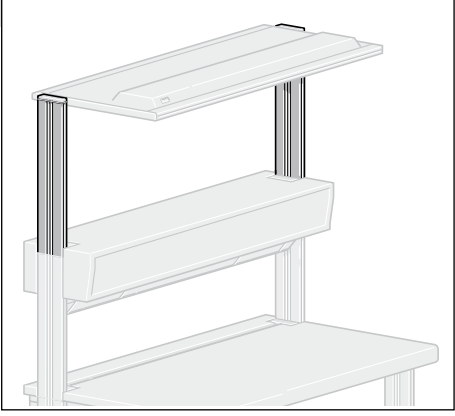-  Multifunctional lamp with system profile
-  Profile cover
-  Vertical profile

Multifunctional lamp		<p>Technical data</p> <p>1 illuminated rocker switch</p> <p>Table width 2000 (2 x 58 W) 1800 (2 x 58 W) 1600 (2 x 36 W) 1500 (2 x 36 W) 1200 (2 x 30 W) Light colour 21</p> <p>InForm lamp vertical profile (pair) for mounting directly onto an InForm table</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>1928 x 650</td> <td>65</td> <td>75-1G</td> </tr> <tr> <td>1728 x 650</td> <td>65</td> <td>75-1A</td> </tr> <tr> <td>1528 x 650</td> <td>65</td> <td>75-1D</td> </tr> <tr> <td>1428 x 650</td> <td>65</td> <td>75-1B</td> </tr> <tr> <td>1128 x 650</td> <td>65</td> <td>75-1C</td> </tr> <tr> <td>34 x 123</td> <td>1264</td> <td>75-1T</td> </tr> </tbody> </table>	Width	Depth	Height	1928 x 650	65	75-1G	1728 x 650	65	75-1A	1528 x 650	65	75-1D	1428 x 650	65	75-1B	1128 x 650	65	75-1C	34 x 123	1264	75-1T	<table border="1"> <thead> <tr> <th>Order no.</th> </tr> </thead> <tbody> <tr> <td>75-1G</td> </tr> <tr> <td>75-1A</td> </tr> <tr> <td>75-1D</td> </tr> <tr> <td>75-1B</td> </tr> <tr> <td>75-1C</td> </tr> <tr> <td>75-1T</td> </tr> </tbody> </table>	Order no.	75-1G	75-1A	75-1D	75-1B	75-1C	75-1T
Width	Depth	Height																														
1928 x 650	65	75-1G																														
1728 x 650	65	75-1A																														
1528 x 650	65	75-1D																														
1428 x 650	65	75-1B																														
1128 x 650	65	75-1C																														
34 x 123	1264	75-1T																														
Order no.																																
75-1G																																
75-1A																																
75-1D																																
75-1B																																
75-1C																																
75-1T																																
Vertical profile		<p>Technical data</p> <p>1 pair of profiles for mounting onto a shelf element</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>34 x 123</td> <td>784</td> <td>75-1U</td> </tr> </tbody> </table>	Width	Depth	Height	34 x 123	784	75-1U	<table border="1"> <thead> <tr> <th>Order no.</th> </tr> </thead> <tbody> <tr> <td>75-1U</td> </tr> </tbody> </table>	Order no.	75-1U																				
Width	Depth	Height																														
34 x 123	784	75-1U																														
Order no.																																
75-1U																																
Vertical profile		<p>Technical data</p> <p>1 pair of profiles for installation onto a 3HU table rack</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>34 x 123</td> <td>607</td> <td>75-1V</td> </tr> </tbody> </table>	Width	Depth	Height	34 x 123	607	75-1V	<table border="1"> <thead> <tr> <th>Order no.</th> </tr> </thead> <tbody> <tr> <td>75-1V</td> </tr> </tbody> </table>	Order no.	75-1V																				
Width	Depth	Height																														
34 x 123	607	75-1V																														
Order no.																																
75-1V																																
Vertical profile		<p>Technical data</p> <p>1 pair of profiles for installation onto a System 266 table rack or for a shelf unit rack</p> <p>Vertical profile sets consist of 2 aluminium profiles with fastening fittings and profile covers</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>34 x 123</td> <td>463</td> <td>75-1W</td> </tr> </tbody> </table> <p>Dimensions in mm</p>	Width	Depth	Height	34 x 123	463	75-1W	<table border="1"> <thead> <tr> <th>Order no.</th> </tr> </thead> <tbody> <tr> <td>75-1W</td> </tr> </tbody> </table>	Order no.	75-1W																				
Width	Depth	Height																														
34 x 123	463	75-1W																														
Order no.																																
75-1W																																

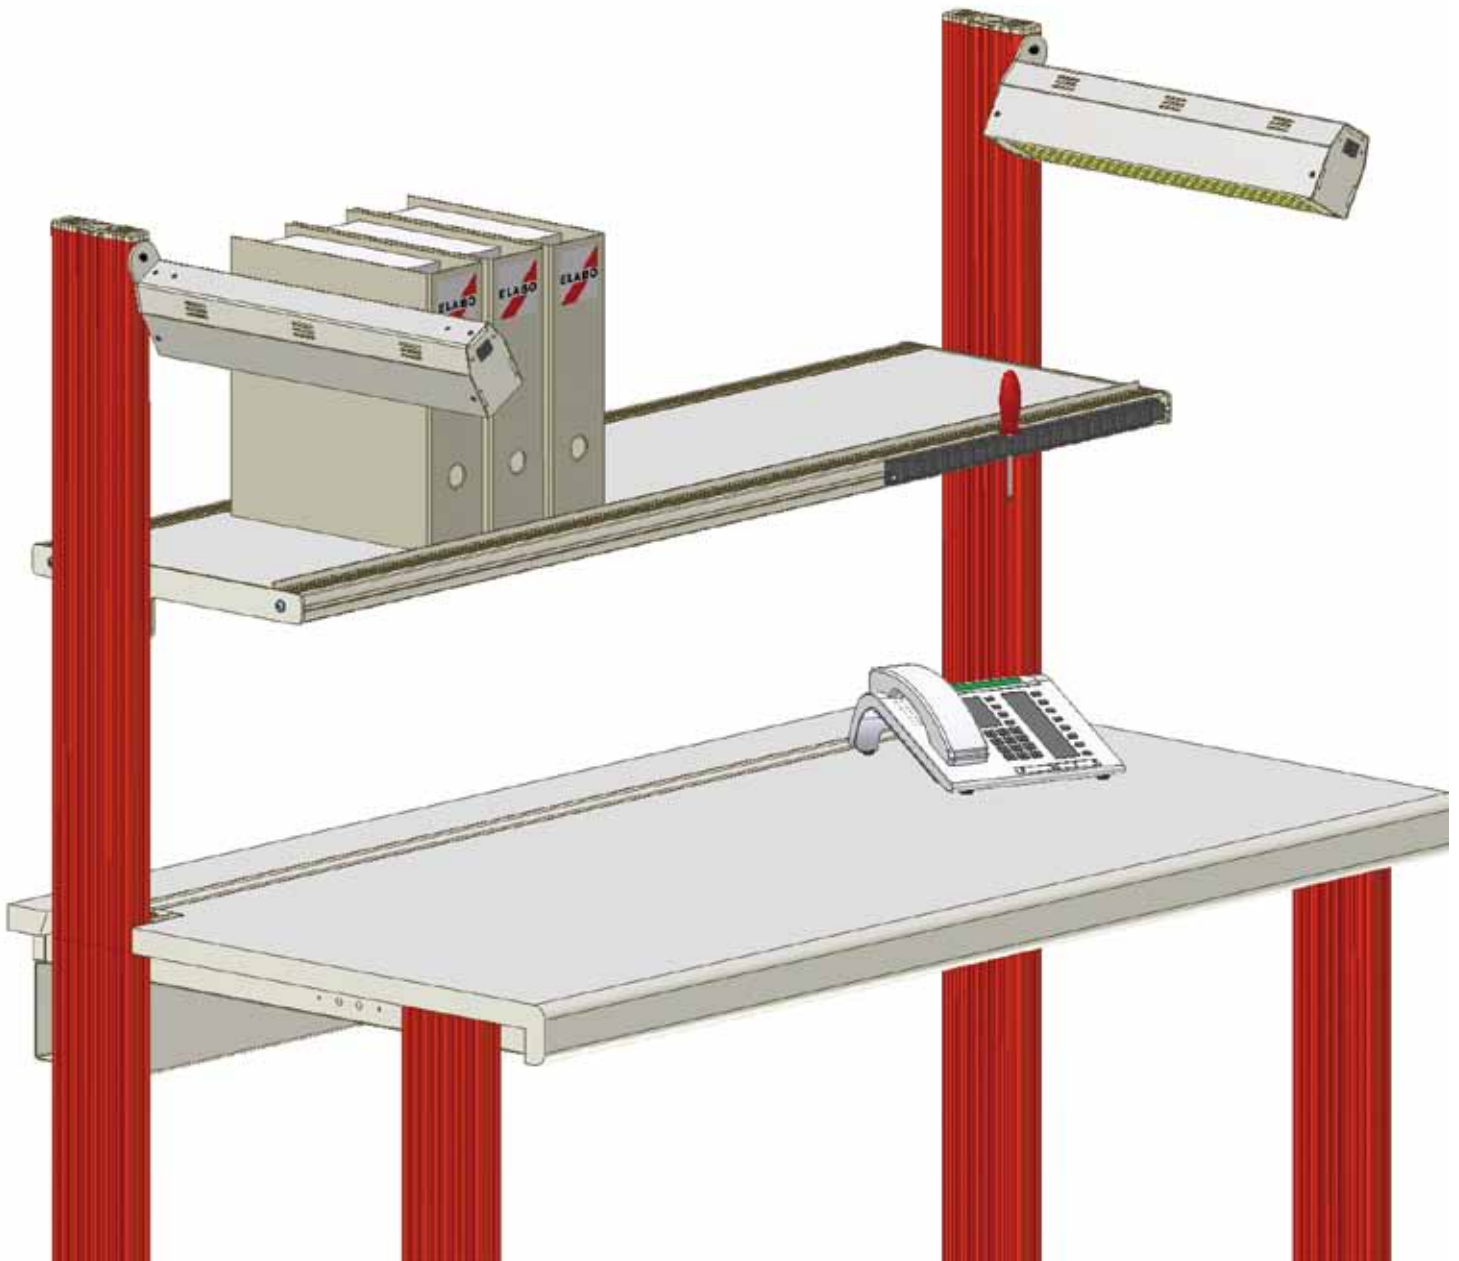


Attractively shaped, compact work station lamps create a bright, even light. Attached to the left and right of each vertical profile, they light up the entire surface beneath them with almost no glare.

The angle of the refracted beam and the fastening height can be continuously adjusted on all vertical profiles already present or can be ordered separately. The lamp body is made of anodised aluminium profile; mirrored parabolic diffusers are installed in the reflector, which limit the angle of the beam.

Equipment: Energy-saving compact fluorescent lamp
1 x 36 W. Lamps are supplied with a fastening fitting.

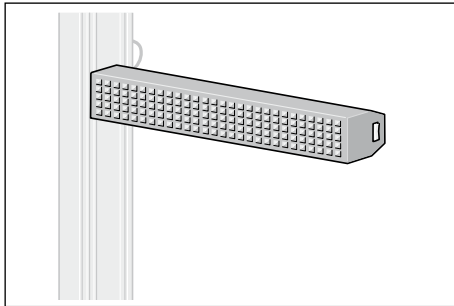Work station lamp



Technical data

System work station swivel lamp, aluminium housing with mirrored parabolic grid
 Equipment: 36 W fluorescent lamp with an electronic ballast and switch.
 Can be mounted on the front left or right of the vertical profile, inc. mounting adaptor.

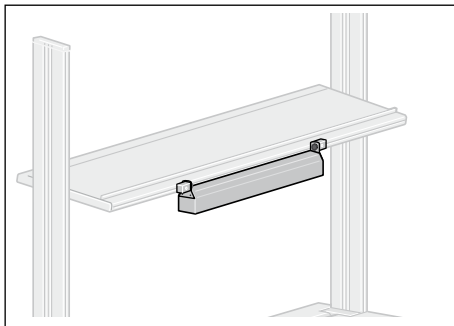
Width Depth Height

492 x 95 x 65

Order no.

75-1M

Work station lamp



Technical data

as with 75-1M
 For installation on the front side of the functional shelf, incl. fastening adapters

Width Depth Height

492 x 95 x 65

Order no.

75-1R

**Lamp body**

The lamp body is made of an extruded aluminium profile with built-in strip lamp and a socket for the avoidance of direct glare.

Saving energy

Only energy-saving compact fluorescent lamps and electronic ballasts are used.

Installation

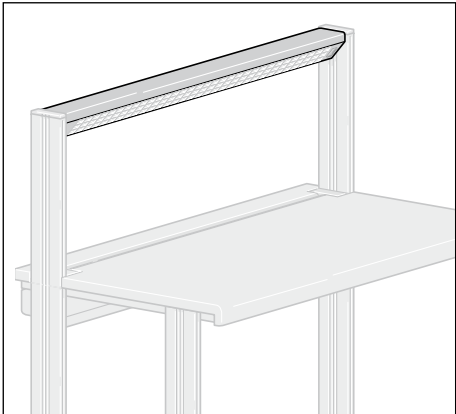
If you order the master lamp with vertical profile, it will be shipped completely connection-ready and mounted on the vertical profiles.


Additional function elements


Other InForm functional elements such as functional shelves or storage elements can be mounted above the master lamp using two vertical profiles.


Adaptation technology

Additional adaptors with swivel arms can be attached to the side of the vertical profile.

Master lamp		Technical data	Width	Depth	Height	Order no.
		Self-supporting, with one lamp. Light colour 840 1 illuminated rocker switch				
		58 W for table width 2000 mm	1928	105	98	75-2G
		58 W for table width 1800 mm	1728	105	98	75-2A
		36 W for table width 1600 mm	1528	105	98	75-2D
		36 W for table width 1500 mm	1428	105	98	75-2B
		30 W for table width 1200 mm	1128	105	98	75-2C

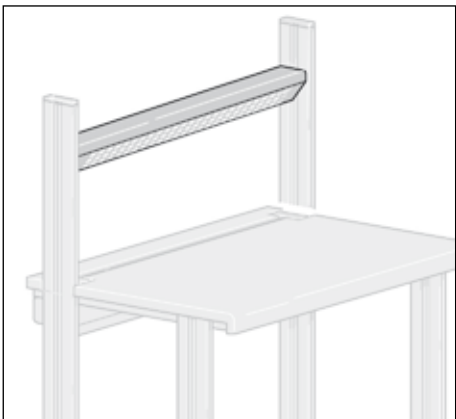Master lamp		Technical data	Width	Depth	Height	Order no.
		height-adjustable and inclinable, with one lamp, light colour 840 1 illuminated rocker switch				
		58 W for table width 2000 mm	1928	105	98	75-2G Z007
		58 W for table width 1800 mm	1728	105	98	75-2A Z007
		36 W for table width 1600 mm	1528	105	98	75-2D Z007
		36 W for table width 1500 mm	1428	105	98	75-2B Z007
		30 W for table width 1200 mm	1128	105	98	75-2C Z007
		Please enter the lamp fastening height.				

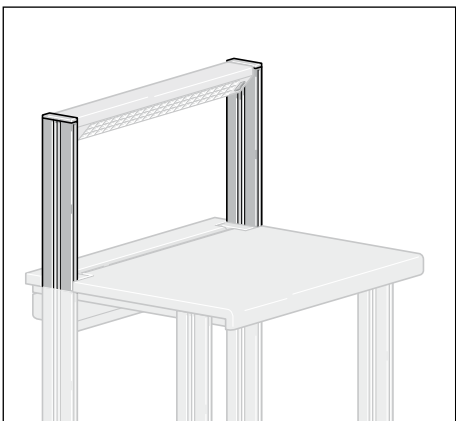Vertical profiles		Technical data	Width	Depth	Height	Order no.
		InForm master lamp vertical profile consisting of 2 aluminium vertical profiles with fastening fittings and profile covers	34	123	480	75-2X
		Additional heights available.				
			Dimensions in mm			

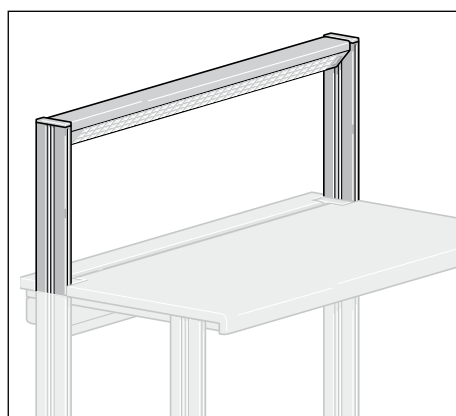

Example order for table width 1800 mm

InForm master lamp, self-supporting 75-2A
 InForm master lamp vertical profile 75-2X



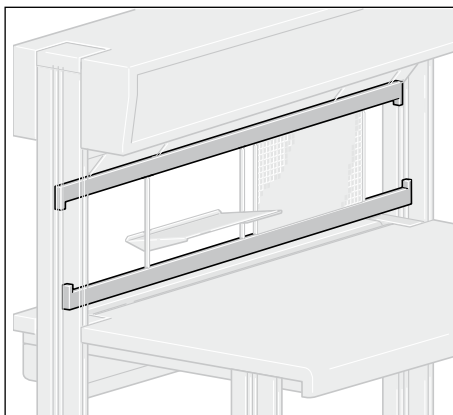
The variable frame technology makes it possible to have individualized adjustment and allocation for alternating work processes. The suspension elements can be adjusted easily and accessibly, depending on the task at hand.

The variable frame rails made of extruded aluminium profile are mounted between the vertical profiles. The suspension elements can be simply inserted into the grooves of the aluminium H profiles and slide without difficulty laterally along the entire width of the table or also be replaced with one another.

The support rails can be attached within the vertical profiles at any required position.


DIN A4 experiment boards from all common teaching systems can also be attached.

Variable frame profile



Technical data	Width	Depth	Height	Order no.
InForm variable frames consists of two aluminium profiles with fastening fittings				
For table width 2000 mm	1928 x	18 x	35	76-1Y
For table width 1800 mm	1728 x	18 x	35	76-1A
For table width 1600 mm	1528 x	18 x	35	76-1K
For table width 1500 mm	1428 x	18 x	35	76-1B
For table width 1200 mm	1128 x	18 x	35	76-1C

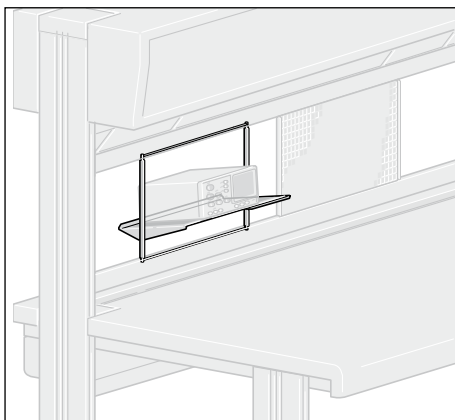
Measurement device platform



Technical data
Sturdy frame with swivel storage platform and anti-slip mat, suitable for setting up measurement devices, soldering stations etc.

Width	Depth	Height	Order no.
378	x 290	x 297	76-1D

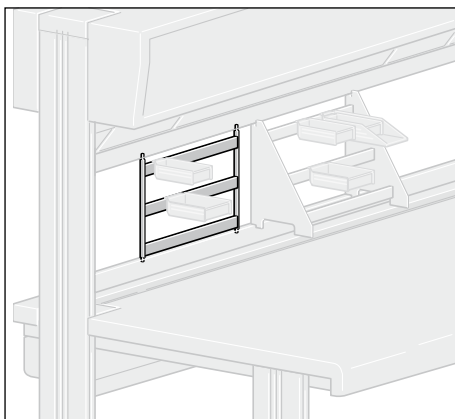
Grab container shelf



Technical data
For inserting into the variable frame; for three rows with grab containers

Width	Depth	Height	Order no.
378	x 20	x 297	76-1E

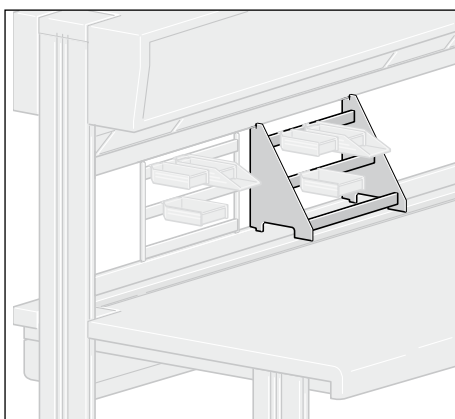
Grab container tray



Technical data
For hanging into the variable frames or for setting up on the table or on a swivel arm, for three rows with grab containers

Width	Depth	Height	Order no.
378	x 250	x 297	76-1F

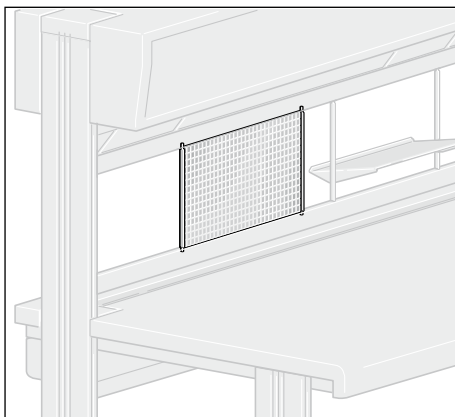Perforated grid




Technical data
suitable for the mounting of storage boards, storage trays, tool holders and other assembly aids.
Perforation 5 x 10 mm with 3 mm bridge

Width	Depth	Height	Order no.
460	x 20	x 297	76-1G

Dimensions in mm

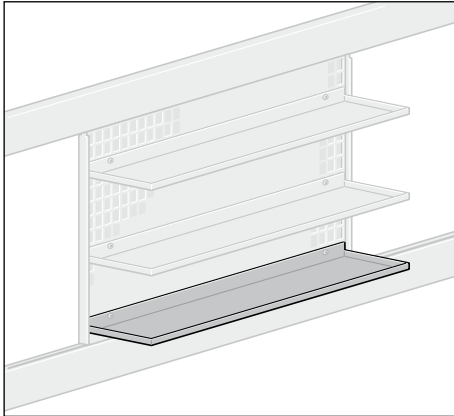Storage board



Technical data

InForm storage board for attaching to the perforated grid or functional shelf made of coated aluminium sheet with anti-slip mat

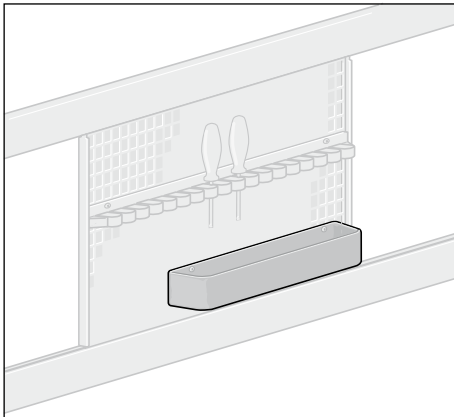
Width Depth Height

448 x 115 x 10

Order no.

76-1H

Storage tray



Technical data

InForm storage tray made of polystyrene, for mounting onto functional shelves or onto the perforated grid.

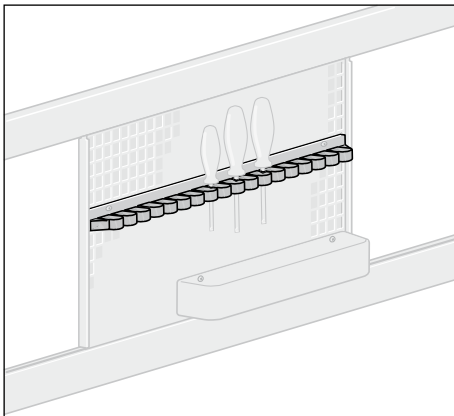
Width Depth Height

390 x 80 x 45

Order no.

83-6L

Tool holder



Technical data

InForm tool holder allowing you to store various tools quickly and close at hand. If you need more space, the individual clips can be removed. For mounting onto the perforated grid or functional shelf
With 6 clips
With 20 clips

Width Depth Height

150 x 40 x 30
440 x 40 x 30

Order no.

81-8Q
81-8P





Grab containers provide small parts close hand in the assembly area or the equipment work station.

Our grab tray range is available in 2 widths, and grab trays, grab containers and grab tongues of the same width can be combined according to your purposes.

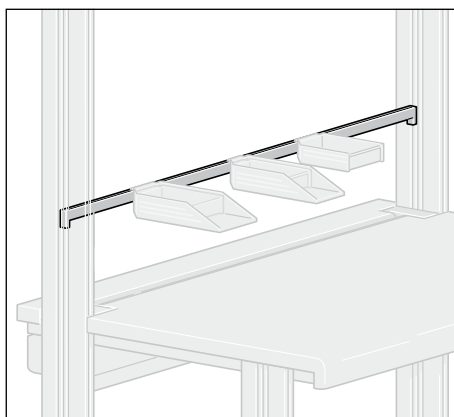
The grab containers can be used with the aid of three different elements:

1. Hanger profile
2. Grab container shelf for hanging in the InForm variable frame
3. Grab container tray for hanging in the variable frame as well as for placing on the worktable or on a swivel arm.

Advantages:

- Optimum provision of parts kept within reach
- Ergonomic grab tongue for picking up parts quickly and safely
- System elements can be combined in a multitude of ways
- Clear marking of parts

Hanger profile



Technical data

For quick attachment and removal of grab containers

- For table width 2000 mm
- For table width 1800 mm
- For table width 1600 mm
- For table width 1500 mm
- For table width 1200 mm

Also available in ESD design

Width	Depth	Height	Order no.
1928 x	15 x	30	76-2Y
1728 x	15 x	30	76-2A
1528 x	15 x	30	76-2A ZB160
1428 x	15 x	30	76-2B
1128 x	15 x	30	76-2C



1 Grab trays

Using the grab trays, small parts can be kept close at hand where space is limited. The integrated lip allows quick and safe removal of parts.

2 Grab containers

Grab containers allow you to keep parts close at hand at your work station. They are inserted into the grab tongue. The grab tongue facilitates quick and secure part removal due to its separating area. You can also remove parts directly from the grab container.

3 Grab tongues

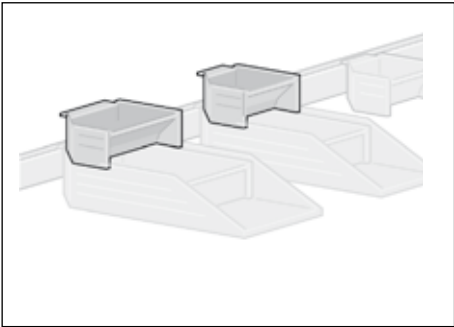

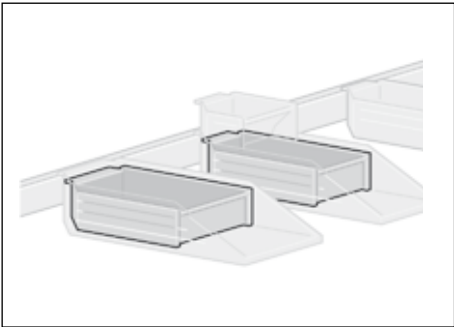

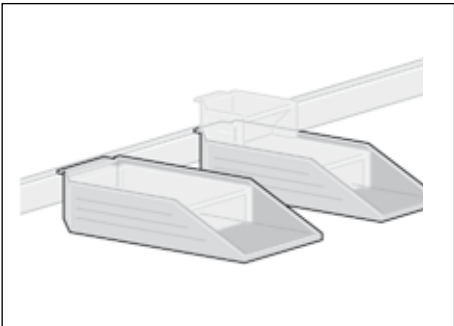




Grab tongues consist of two functional parts: The grab container with the equipment components is placed in the rear compartment. The front part corresponds with ergonomic requirements for quick and safe removal of parts. A small number of parts are scooped onto the removing area. These pre-sorted parts can be easily recognised and removed quickly and safely.








①

②

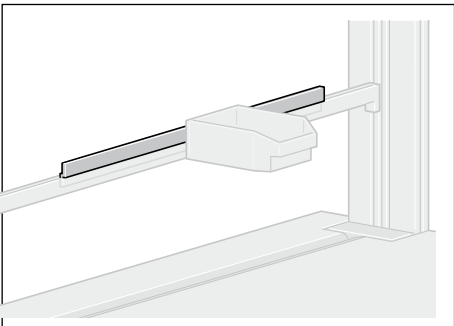③

Grab tray		<p>Technical data</p> <p>Standard</p> <p>Also available in ESD design </p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>82 x</td> <td>86 x</td> <td>50</td> </tr> <tr> <td>123 x</td> <td>86 x</td> <td>50</td> </tr> </tbody> </table>	Width	Depth	Height	82 x	86 x	50	123 x	86 x	50	<table border="1"> <thead> <tr> <th>Order no.</th> </tr> </thead> <tbody> <tr> <td>76-2E</td> </tr> <tr> <td>76-2F</td> </tr> </tbody> </table>	Order no.	76-2E	76-2F
Width	Depth	Height														
82 x	86 x	50														
123 x	86 x	50														
Order no.																
76-2E																
76-2F																
Grab container		<p>Technical data</p> <p>Standard</p> <p>Also available in ESD design </p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>82 x</td> <td>173 x</td> <td>50</td> </tr> <tr> <td>123 x</td> <td>173 x</td> <td>50</td> </tr> </tbody> </table>	Width	Depth	Height	82 x	173 x	50	123 x	173 x	50	<table border="1"> <thead> <tr> <th>Order no.</th> </tr> </thead> <tbody> <tr> <td>76-2J</td> </tr> <tr> <td>76-2K</td> </tr> </tbody> </table>	Order no.	76-2J	76-2K
Width	Depth	Height														
82 x	173 x	50														
123 x	173 x	50														
Order no.																
76-2J																
76-2K																
Grab tongue		<p>Technical data</p> <p>Standard</p> <p>Also available in ESD design </p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>90 x</td> <td>277 x</td> <td>54</td> </tr> <tr> <td>131 x</td> <td>277 x</td> <td>54</td> </tr> </tbody> </table>	Width	Depth	Height	90 x	277 x	54	131 x	277 x	54	<table border="1"> <thead> <tr> <th>Order no.</th> </tr> </thead> <tbody> <tr> <td>76-2N</td> </tr> <tr> <td>76-2P</td> </tr> </tbody> </table>	Order no.	76-2N	76-2P
Width	Depth	Height														
90 x	277 x	54														
131 x	277 x	54														
Order no.																
76-2N																
76-2P																
Labelling clip		<p>Technical data</p> <p>With the labelling clip, the material can be marked easily and securely; the labelling clip fits all grab containers.</p> <p>Set of 10</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Width	Depth	Height				<table border="1"> <thead> <tr> <th>Order no.</th> </tr> </thead> <tbody> <tr> <td>76-2S</td> </tr> </tbody> </table>	Order no.	76-2S				
Width	Depth	Height														
Order no.																
76-2S																
Adaptor rail		<p>Technical data</p> <p>made of PVC, for insertion on the hanger profiles The adaptor rail allows storage containers of various brands to be hung up on the hanger profile</p> <p>Also available in ESD design </p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>500 x</td> <td>6 x</td> <td>24</td> </tr> </tbody> </table> <p>Dimensions in mm</p>	Width	Depth	Height	500 x	6 x	24	<table border="1"> <thead> <tr> <th>Order no.</th> </tr> </thead> <tbody> <tr> <td>76-2D</td> </tr> </tbody> </table>	Order no.	76-2D				
Width	Depth	Height														
500 x	6 x	24														
Order no.																
76-2D																
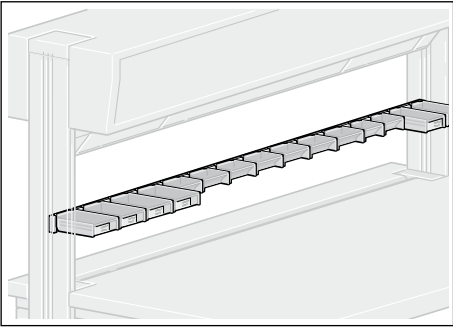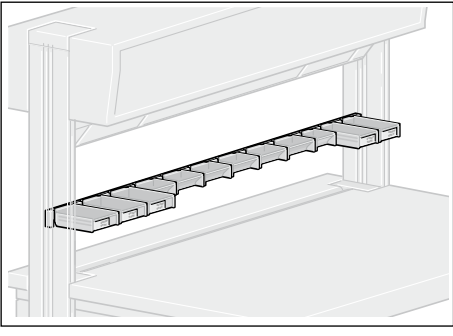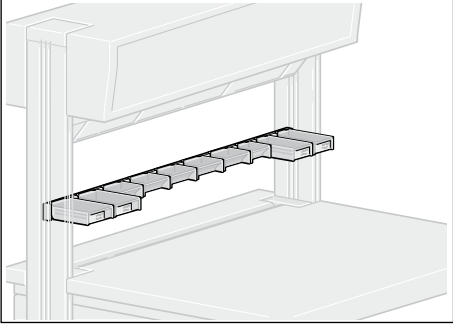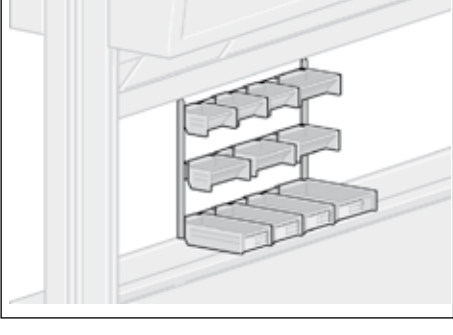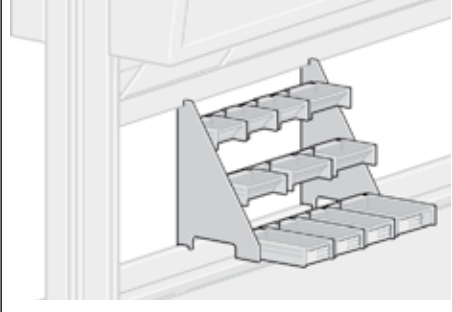
<p>Grab container set</p> <p>For table width 1800 mm</p>		<p>Technical data</p> <p>Inc. hanger profile rail 76-2A Set consists of: 4 x grab containers 76-2K 7 x grab trays 76-2F 2 x grab tray 76-2E 2 x grab containers 76-2J 1 x labelling clip 76-2S</p> <p>Also available in ESD design</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>123 x</td> <td>173 x</td> <td>50</td> </tr> <tr> <td>123 x</td> <td>86 x</td> <td>50</td> </tr> <tr> <td>82 x</td> <td>86 x</td> <td>50</td> </tr> <tr> <td>82 x</td> <td>173 x</td> <td>50</td> </tr> </tbody> </table>	Width	Depth	Height	123 x	173 x	50	123 x	86 x	50	82 x	86 x	50	82 x	173 x	50	<p>Order no.</p> <p>76-2T</p>
Width	Depth	Height																	
123 x	173 x	50																	
123 x	86 x	50																	
82 x	86 x	50																	
82 x	173 x	50																	
<p>Grab container set</p> <p>For table width 1500 mm</p>		<p>Technical data</p> <p>Inc. hanger profile rail 76-2B Set consists of: 3 x grab containers 76-2K 6 x grab trays 76-2F 1 x grab tray 76-2E 2 x grab containers 76-2J 1 x labelling clip 76-2S</p> <p>Also available in ESD design</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>123 x</td> <td>173 x</td> <td>50</td> </tr> <tr> <td>123 x</td> <td>86 x</td> <td>50</td> </tr> <tr> <td>82 x</td> <td>86 x</td> <td>50</td> </tr> <tr> <td>82 x</td> <td>173 x</td> <td>50</td> </tr> </tbody> </table>	Width	Depth	Height	123 x	173 x	50	123 x	86 x	50	82 x	86 x	50	82 x	173 x	50	<p>Order no.</p> <p>76-2U</p>
Width	Depth	Height																	
123 x	173 x	50																	
123 x	86 x	50																	
82 x	86 x	50																	
82 x	173 x	50																	
<p>Grab container set</p> <p>For table width 1200 mm</p>		<p>Technical data</p> <p>Inc. hanger profile rail 76-2C Set consists of: 2 x grab containers 76-2K 5 x grab tray 76-2F 1 x grab tray 76-2E 2 x grab containers 76-2J 1 x labelling clip 76-2S</p> <p>Also available in ESD design</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>123 x</td> <td>173 x</td> <td>50</td> </tr> <tr> <td>123 x</td> <td>86 x</td> <td>50</td> </tr> <tr> <td>82 x</td> <td>86 x</td> <td>50</td> </tr> <tr> <td>82 x</td> <td>173 x</td> <td>50</td> </tr> </tbody> </table>	Width	Depth	Height	123 x	173 x	50	123 x	86 x	50	82 x	86 x	50	82 x	173 x	50	<p>Order no.</p> <p>76-2V</p>
Width	Depth	Height																	
123 x	173 x	50																	
123 x	86 x	50																	
82 x	86 x	50																	
82 x	173 x	50																	
<p>Grab container set</p>		<p>Technical data</p> <p>Inc. hanging shelf 76-1E, consists of: 3 x grab trays 76-2E 4 x grab trays 76-2F 3 x grab containers 76-2J 1 x grab containers 76-2K 1 x labelling clip 76-2S</p> <p>Also available in ESD design</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>82 x</td> <td>86 x</td> <td>50</td> </tr> <tr> <td>123 x</td> <td>86 x</td> <td>50</td> </tr> <tr> <td>82 x</td> <td>173 x</td> <td>50</td> </tr> <tr> <td>123 x</td> <td>173 x</td> <td>50</td> </tr> </tbody> </table>	Width	Depth	Height	82 x	86 x	50	123 x	86 x	50	82 x	173 x	50	123 x	173 x	50	<p>Order no.</p> <p>76-2W</p>
Width	Depth	Height																	
82 x	86 x	50																	
123 x	86 x	50																	
82 x	173 x	50																	
123 x	173 x	50																	
<p>Grab container set</p>		<p>Technical data</p> <p>Inc. hanging tray 76-1F, consists of: 9 x grab containers 76-2J 3 x grab containers 76-2K 1 x labelling clip 76-2S</p> <p>Also available in ESD design</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>82 x</td> <td>173 x</td> <td>50</td> </tr> <tr> <td>123 x</td> <td>173 x</td> <td>50</td> </tr> </tbody> </table>	Width	Depth	Height	82 x	173 x	50	123 x	173 x	50	<p>Order no.</p> <p>76-2X</p>						
Width	Depth	Height																	
82 x	173 x	50																	
123 x	173 x	50																	

Dimensions in mm

Practical accessories extend the flexible InForm work station system and are able to meet a wide range of furnishing requirements.

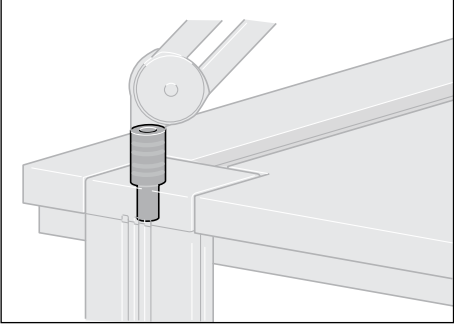
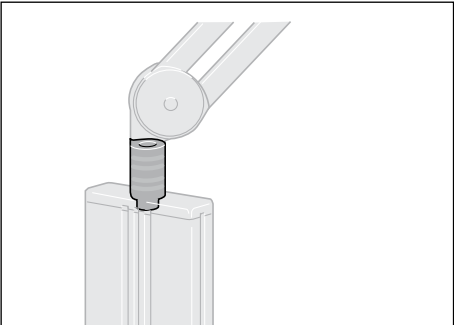
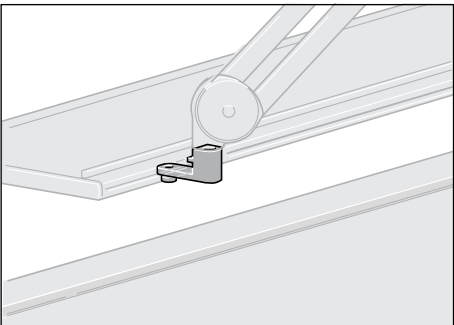
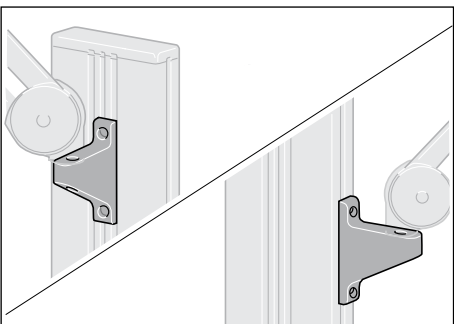
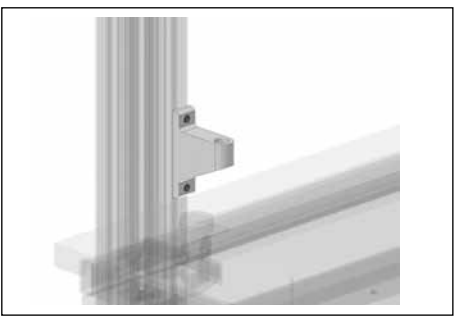
The composition of functional system construction modules is the result of almost 40 years of experience and planning of specialist work stations for electrical engineering and electronics.

For everything which does not belong on the tabletop. For more order, for a wider view, for more oversight.

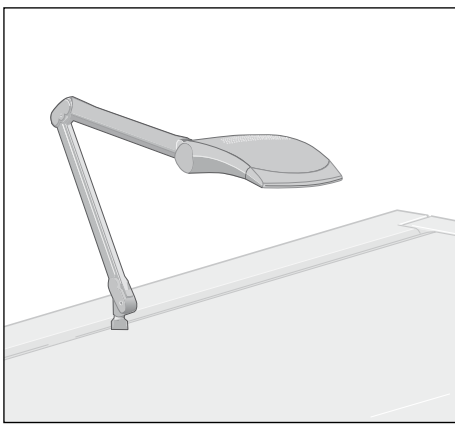
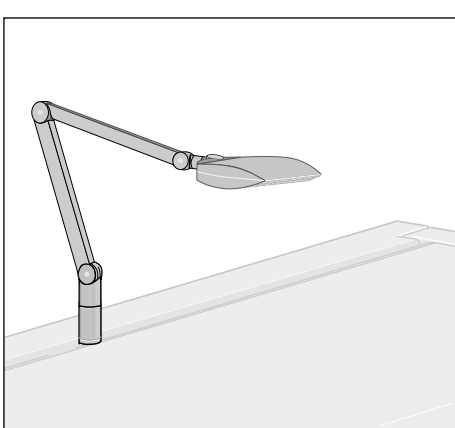
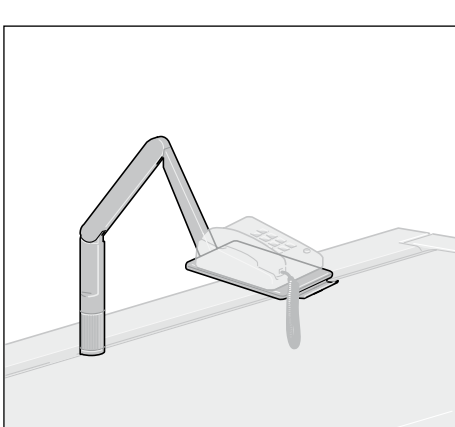
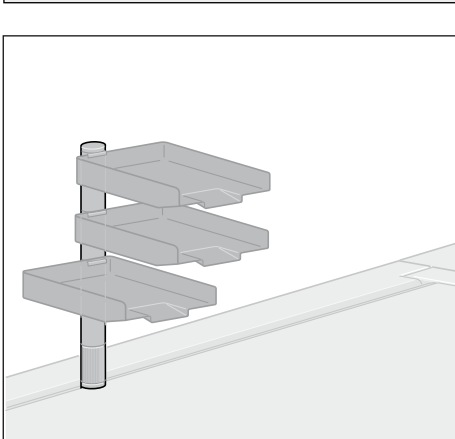
A multitude of furnishing variations can be achieved with these table accessories. With special adaptors and swivel sleeves mounted directly onto the InForm table leg, on the vertical profile or inside the double sealing lip.

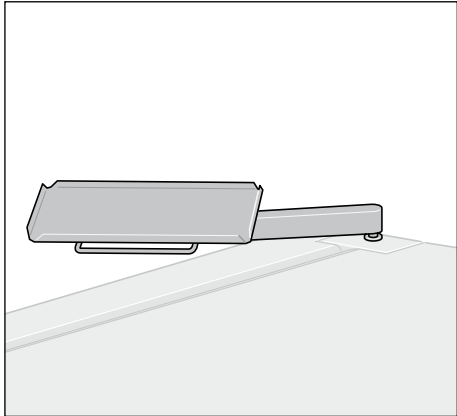
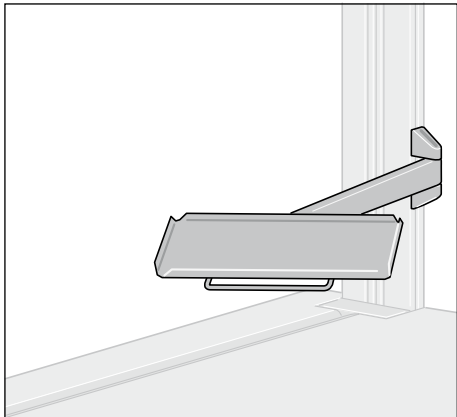
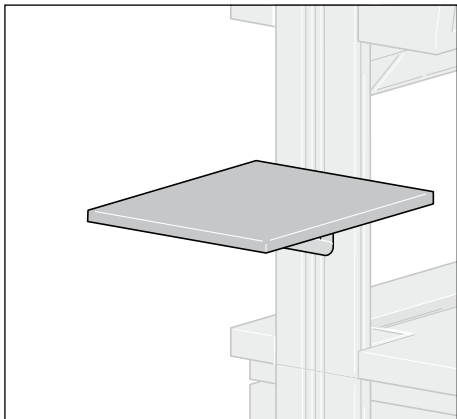



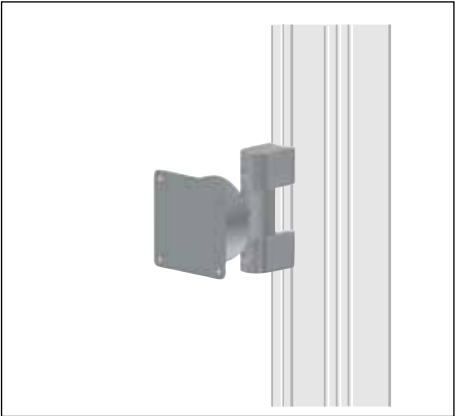
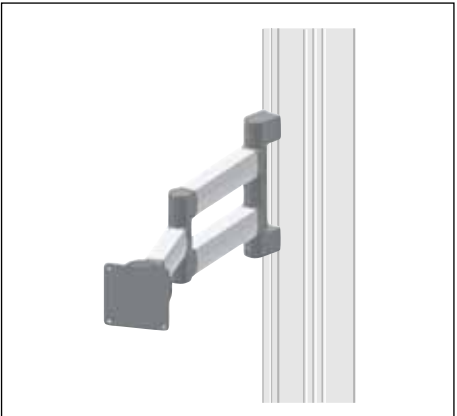
Swivel sleeves		Technical data InForm swivel sleeve for mounting onto vertical profiles with a high cover cap InForm swivel sleeve for mounting onto vertical profiles with a flat cover cap The adaptor is for holding: Work station lamp 85-3A Telephone swivel arm 85-3B Swivel filing tray set 85-3E Supplied with sleeve part	Order no. 78-3C 78-3D
Clamp adaptor		Technical data InForm clamp adaptor for mounting on the vertical profile (optionally on the side or front) The adaptor is used to clamp: Work station lamp 85-3A Telephone swivel arm 85-3B Swivel filing tray set 85-3E Supplied with sleeve part	Order no. 78-3E

Swivel sleeve		<p>Technical data</p> <p>InForm swivel sleeve for mounting onto vertical profiles with a high cover cap. The swivel sleeve is used to hold articulated arm lamps with 13 mm insertion pegs, e.g.:</p> <table border="0"> <tr> <td>Articulated lamp</td> <td>85-1A</td> </tr> <tr> <td>Strip lamp</td> <td>85-1B</td> </tr> <tr> <td>Cold light magnifying lamp</td> <td>85-1C</td> </tr> <tr> <td>Work station lamp</td> <td>85-1D</td> </tr> </table>	Articulated lamp	85-1A	Strip lamp	85-1B	Cold light magnifying lamp	85-1C	Work station lamp	85-1D	<p>Order no.</p> <p>78-4A</p>
Articulated lamp	85-1A										
Strip lamp	85-1B										
Cold light magnifying lamp	85-1C										
Work station lamp	85-1D										
Swivel sleeve		<p>Technical data</p> <p>InForm swivel sleeve for mounting onto vertical profiles with a flat cover cap. The swivel sleeve is used to hold articulated arm lamps with 13 mm insertion pegs, e.g.:</p> <table border="0"> <tr> <td>Articulated lamp</td> <td>85-1A</td> </tr> <tr> <td>Strip lamp</td> <td>85-1B</td> </tr> <tr> <td>Cold light magnifying lamp</td> <td>85-1C</td> </tr> <tr> <td>Work station lamp</td> <td>85-1D</td> </tr> </table>	Articulated lamp	85-1A	Strip lamp	85-1B	Cold light magnifying lamp	85-1C	Work station lamp	85-1D	<p>Order no.</p> <p>78-4B</p>
Articulated lamp	85-1A										
Strip lamp	85-1B										
Cold light magnifying lamp	85-1C										
Work station lamp	85-1D										
Swivel sleeve		<p>Technical data</p> <p>InForm swivel sleeve for mounting onto the front profile of a functional shelf. The swivel sleeve is continuously adjustable horizontally and lockable with a plastic knurled screw. The swivel sleeve is used to hold articulated arm lamps with 13 mm insertion pegs, e.g. as described with 78-4D.</p>	<p>Order no.</p> <p>78-4C</p>								
		<p>Technical data</p> <p>InForm swivel adaptor for installation on vertical profiles, (either laterally or at the front). The swivel adaptor is used to hold articulated arm lamps with 13 mm insertion pegs, e.g.:</p> <table border="0"> <tr> <td>Articulated lamp</td> <td>85-1A</td> </tr> <tr> <td>Strip lamp</td> <td>85-1B</td> </tr> <tr> <td>Cold light magnifying lamp</td> <td>85-1C</td> </tr> <tr> <td>Work station lamp</td> <td>85-1D</td> </tr> </table>	Articulated lamp	85-1A	Strip lamp	85-1B	Cold light magnifying lamp	85-1C	Work station lamp	85-1D	<p>Order no.</p> <p>78-4D</p>
Articulated lamp	85-1A										
Strip lamp	85-1B										
Cold light magnifying lamp	85-1C										
Work station lamp	85-1D										
Swivel adaptor		<p>Technical data</p> <p>InForm swivel adaptor for lateral installation on vertical profiles. The swivel adaptor is used to hold the LED magnifying lamp 85-1E with a diameter of 16 mm.</p>	<p>Order no.</p> <p>78-4E</p>								


Adapter technology for tables with hinged cable flap.

Office lamp		<p>Technical data</p> <p>The glare-free office work station lamp fulfils all requirements for a modern and ergonomic office. Illuminant: 18 W. Connection cable 2 m with Euro plug. With 13 mm insertion pegs. Colour: White</p>	<p>Order no.</p> <p>85-1D</p>
Work station lamp		<p>Technical data</p> <p>Work station lamp for office and EDP work stations. The lamp offers optimum, extensive and healthy light. In compliance with DIN 5035 for office workstations. This is provided by an 18 W energy saving lamp with the light of a normal 100 W bulb. A high-gloss light grid guarantees asymmetrically directed light emission while at the same time excluding any direct glare. Any desired positioning is possible with the spring-balanced articulated arm. Connection cable 2 m long. Colour: light grey.</p>	<p>Order no.</p> <p>85-3A</p>
Telephone swivel arm		<p>Technical data</p> <p>Telephone swivel arm for all conventional telephones. Keeps desks clear and telephones safe and close at hand. This is due to the patented three-point bracket. The keypad can be seen easily in any position and is easy to operate because the base adapts itself to the respective inclination in an ergonomic and user-friendly manner. The base can be mounted upright or horizontally. Colour: light grey.</p>	<p>Order no.</p> <p>85-3B</p>
Filing tray set		<p>Technical data</p> <p>Swivel filing tray set with three transparent filing trays with recessed grip in DIN A4 format, for longitudinal or transverse hanging. Label holders with paper for guaranteed tidiness are included in delivery. Colour: light grey, inc. universal ferrule.</p>	<p>Order no.</p> <p>85-3E</p>

Swivel tray		<p>Technical data</p> <p>InForm rotary shelf suitable for supporting meters, assembly aids, tools, etc. Shelf made of aluminium plate with anti-slip mat. Swivel arm and shelf can each be rotated by 360°, which means that any desired position can be set without difficulty. Supplied inc. swivel sleeve for mounting onto the rear InForm table leg. Dimensions of the shelf: 390 x 300 mm Reach 560 mm Load: 14 kg Colour: light grey</p>	<p>Order no.</p> <p>78-3L</p>
Swivel arm		<p>Technical data</p> <p>InForm Swivel arm for setting down measurement devices, assembly aids, grab tray basket, etc. Storage platform made of aluminium sheet with anti-slip mat, continuously adjustable up to 25°. Supplied with fastening fitting; suitable for mounting onto a vertical profile (facing side or at the side) Dimensions of the shelf: 390 x 300 mm Reach 680 mm Load: 7 kg Colour: light grey</p>	<p>Order no.</p> <p>78-3M</p>
Device storage platform		<p>Technical data</p> <p>InForm additional device storage platform, lowerable, for mounting onto the side of the system profile Max. load: 20 kg Colour: light grey Dimensions: 350 x 400 x 19 mm (W x D x H)</p> <p>Device storage platform left Device storage platform right</p>	<p>Order no.</p> <p>78-3P 78-3Q</p>

Keyboard shelf		<p>Technical data</p> <p>Keyboard shelf with lateral bearing guide, extendable by 230 mm.</p> <p>End positions can be locked.</p> <p>Height adjustable in the 11 mm grid</p> <p>Shelf inner measurements:</p> <p>Width 600 mm Depth 267 mm</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>680 x</td> <td>300</td> <td>x 85 - 110</td> </tr> </tbody> </table>	Width	Depth	Height	680 x	300	x 85 - 110	<table border="1"> <thead> <tr> <th>Order no.</th> </tr> </thead> <tbody> <tr> <td>85-4F-1</td> </tr> </tbody> </table>	Order no.	85-4F-1
Width	Depth	Height										
680 x	300	x 85 - 110										
Order no.												
85-4F-1												
TFT bracket		<p>Technical data</p> <p>For height-variable mounting onto the facing side of the InForm profile, for monitors up to 12 kg</p> <p>1 VESA adapter 75/100 for monitor installation 1 horizontal swivel joint 1 spherical head</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td></td> <td>125 x</td> <td>115</td> </tr> </tbody> </table>	Width	Depth	Height		125 x	115	<table border="1"> <thead> <tr> <th>Order no.</th> </tr> </thead> <tbody> <tr> <td>P3-5L</td> </tr> </tbody> </table>	Order no.	P3-5L
Width	Depth	Height										
	125 x	115										
Order no.												
P3-5L												
TFT swivel arm		<p>Technical data</p> <p>For mounting at any height onto the facing side or side of the InForm profile, for monitors up to 10 kg</p> <p>1 VESA adapter 75/100 for monitor installation 2 horizontal swivel joints 1 spherical head</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td></td> <td>455 x</td> <td>200</td> </tr> </tbody> </table> <p>Dimensions in mm</p>	Width	Depth	Height		455 x	200	<table border="1"> <thead> <tr> <th>Order no.</th> </tr> </thead> <tbody> <tr> <td>P3-5K</td> </tr> </tbody> </table>	Order no.	P3-5K
Width	Depth	Height										
	455 x	200										
Order no.												
P3-5K												

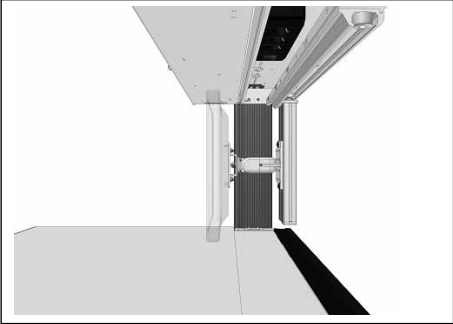TFT carriages can be hung only in the unique Elabo cable management.

TFT carriages		Technical data		Order no.
Carriage below basic rack		TFT carriages for moving 17" / 19" monitors across the entire width of the table. With articular head and mounting panel for holding TFT Monitors in accordance with the VESA standard with 75 x 75 mm and 100 x 100 mm panel. Max. weight 20 kg	Carriages Guide profile for basic rack ... 75-5E 75-5A 75-5D 75-5B 75-5C	75-5T 75-5S 2000 75-5S 1800 75-5S 1600 75-5S 1500 75-5S 1200



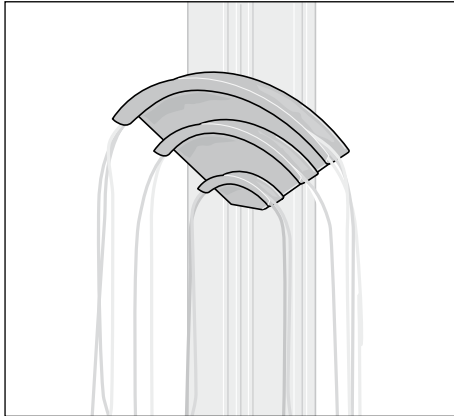
Installation

Mounted on the basic rack, the carriage can be slid across the entire width, thus making it possible to position the monitor wherever one wants it.

Fastening


A simple fixing mechanism holds the monitor in the desired position. Slight forward pressure releases the fixture, and the monitor can be moved laterally. The standard VESA attachment allows mounting of all common TFT monitors.

Cable hanging device




Technical data	Width	Depth	Height	Order no.
Cable hanging device made of impact-resistant plastic for mounting onto the side of a vertical profile Colour: light grey	220 x	50 x	120	83-6K

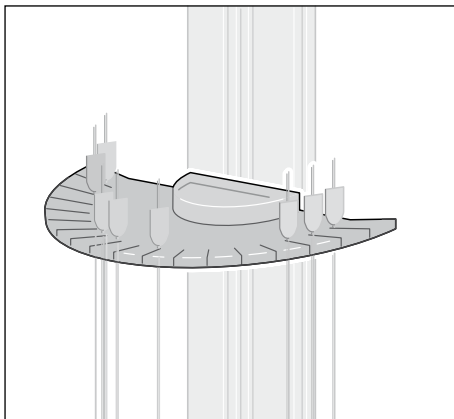Measurement line holder




Technical data	Width	Depth	Height	Order no.
Line holder for installation on the vertical profile. The cable holder is made of aluminium plate. 14 suspension options for storing cable of various thicknesses. The upper half-shell is used for storing small parts. Colour: light grey	380 x	200 x	25	83-6J

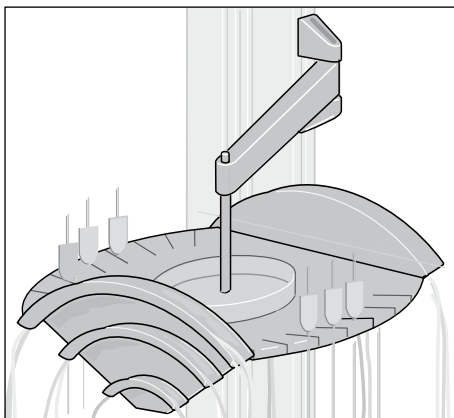Measurement line holder







Technical data	Width	Depth	Height	Order no.
Swivelling and tilting measurement line holder combined with 2 cable hanging devices. The semicircular measurement line holder is made of powder coated aluminium plate with 12 receptacle grooves of various widths. Colour: light grey	380 x	450 x	240	77-5PZ01

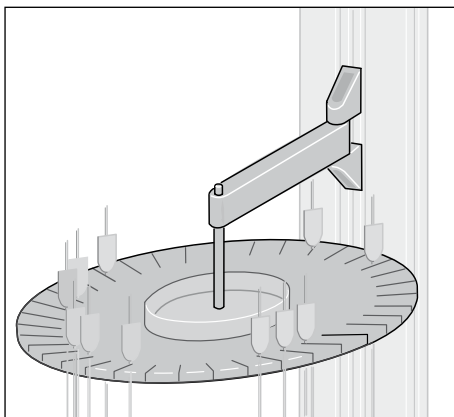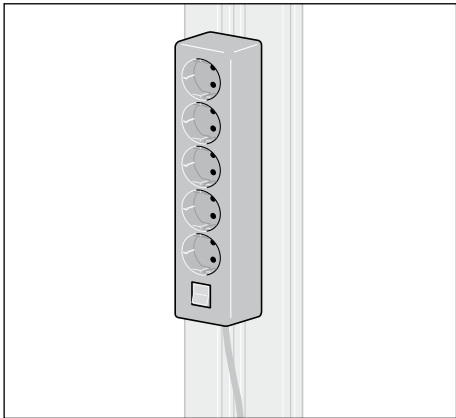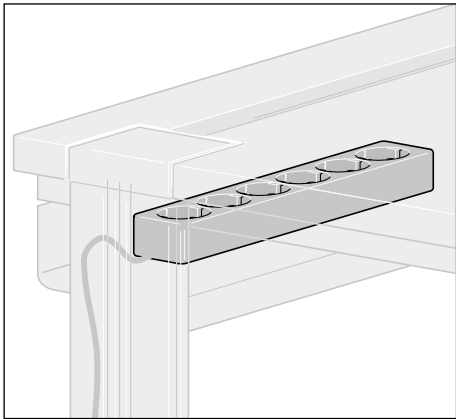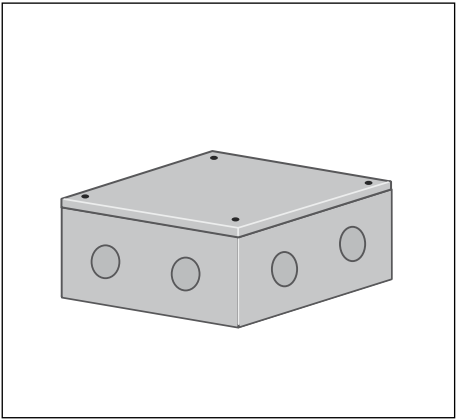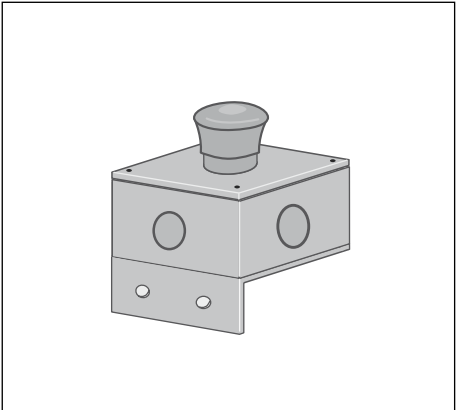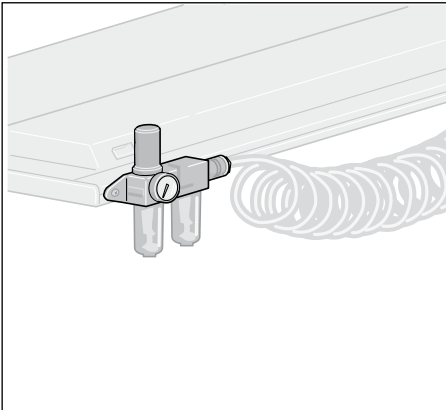
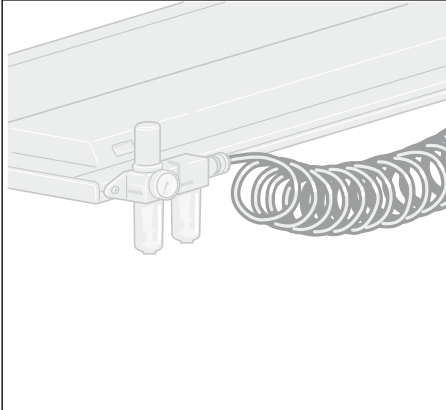
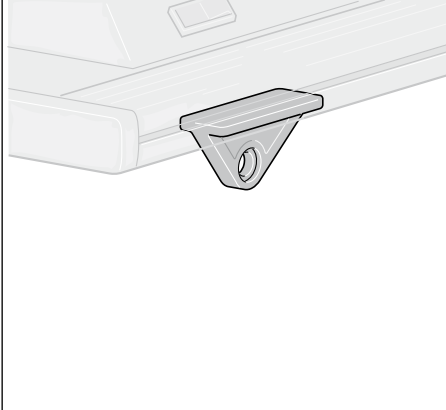

Measurement line holder


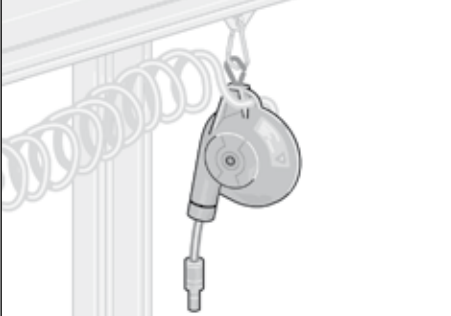

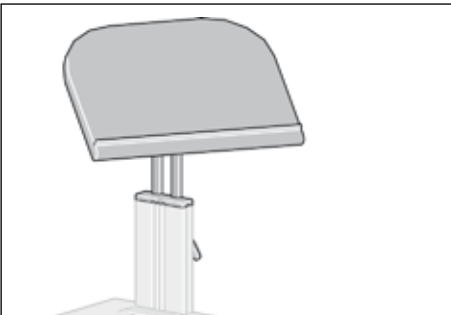
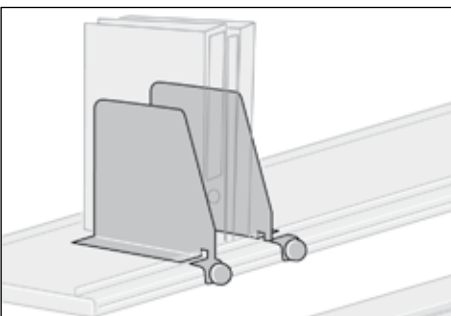






Technical data	Width	Depth	Height	Order no.
Swivelling and tilting measurement line holder made of powder coated aluminium plate (380 mm Ø) with 30 nuts of various widths for holding laboratory and connection cables with different cable diameters. Colour: light grey	380 x	450 x	170	77-5QZ01

Dimensions in mm


5x table socket		<p>Technical data</p> <p>5x table plug outlet with switch and 1.5 m connection line, colour white. Fits in the table channel or for installation on the InForm profile</p> <p>1 set of mounting panels</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>290 x</td> <td>50 x</td> <td>40</td> </tr> </tbody> </table>	Width	Depth	Height	290 x	50 x	40	<table border="1"> <thead> <tr> <th>Order no.</th> </tr> </thead> <tbody> <tr> <td>81-2CZ01</td> </tr> <tr> <td>81-2E</td> </tr> </tbody> </table>	Order no.	81-2CZ01	81-2E
Width	Depth	Height											
290 x	50 x	40											
Order no.													
81-2CZ01													
81-2E													
6x table socket		<p>Technical data</p> <p>6x table plug outlet with 1.5 m connection line, colour white. Fits in the table channel or for installation on the InForm profile</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>330 x</td> <td>50 x</td> <td>40</td> </tr> </tbody> </table>	Width	Depth	Height	330 x	50 x	40	<table border="1"> <thead> <tr> <th>Order no.</th> </tr> </thead> <tbody> <tr> <td>81-2DZ01</td> </tr> </tbody> </table>	Order no.	81-2DZ01	
Width	Depth	Height											
330 x	50 x	40											
Order no.													
81-2DZ01													
Connection housing		<p>Technical data</p> <p>InForm connection housing for the mains connection in the cable tray. Sturdy plastic housing with fixed integrated 8-pole series terminal strip.</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>95 x</td> <td>95 x</td> <td>55</td> </tr> </tbody> </table>	Width	Depth	Height	95 x	95 x	55	<table border="1"> <thead> <tr> <th>Order no.</th> </tr> </thead> <tbody> <tr> <td>78-4V</td> </tr> </tbody> </table>	Order no.	78-4V	
Width	Depth	Height											
95 x	95 x	55											
Order no.													
78-4V													
EMERGENCY-OFF switch		<p>Technical data</p> <p>InForm EMERGENCY OFF switch (push/pull), mounted in the plastic housing, incl. fastening angle for installation on the InForm vertical profile. connection cable preassembled with ferrules.</p> <p>Dimensions in mm</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>68 x</td> <td>68 x</td> <td>50</td> </tr> </tbody> </table>	Width	Depth	Height	68 x	68 x	50	<table border="1"> <thead> <tr> <th>Order no.</th> </tr> </thead> <tbody> <tr> <td>78-4W</td> </tr> </tbody> </table>	Order no.	78-4W	
Width	Depth	Height											
68 x	68 x	50											
Order no.													
78-4W													

<p>Maintenance unit</p>		<p>Technical data</p> <p>Maintenance unit complete with filter, regulator and oiler for compressed air screwdriver and plug nipple for spiral hose, for installation on multifunction lamps or vertical profile</p>	<p>Width Depth Height</p> <p>100 x 80 x 160</p>	<p>Order no.</p> <p>78-4L</p>
<p>Spiral hose</p>		<p>Technical data</p> <p>Spiral hose made of polyamide with coupling and plug nipple; complete with anti-kink protection NW 5</p>	<p>Width Depth Height</p> <p>2500</p>	<p>Order no.</p> <p>78-4M</p>
<p>Balancer slide</p>		<p>Technical data</p> <p>Balancer carriage for insertion into the lateral profile of the multifunctional lamp</p>	<p>Width Depth Height</p> <p>60 x 20 x 38</p>	<p>Order no.</p> <p>78-4N</p>
<p>Snap hook</p>		<p>Technical data</p> <p>Snap hook made of steel, for hanging the balancer in the balancer slide</p>	<p>Width Depth Height</p> <p>Dimensions in mm</p>	<p>Order no.</p> <p>78-4P</p>

Balancer		<p>Technical data</p> <p>Balancer Steel housing with bearing load of 1...2 kg. adjustable spring force by means of setting wheel. Cable length max. 1.5 m, inc. 1 snap hook.</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>106 x</td> <td>43 x</td> <td>180</td> </tr> </tbody> </table>	Width	Depth	Height	106 x	43 x	180	<table border="1"> <thead> <tr> <th>Order no.</th> </tr> </thead> <tbody> <tr> <td>78-4Q</td> </tr> </tbody> </table>	Order no.	78-4Q								
Width	Depth	Height																		
106 x	43 x	180																		
Order no.																				
78-4Q																				
Balancer		<p>Technical data</p> <p>Balancer for compressed air tools, spring balancer with hose string and quick connection coupling. Hose extraction: 800 mm Adjustable bearing load: 0.4 ... 0.8 kg</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>145 x</td> <td>80 x</td> <td>230</td> </tr> </tbody> </table>	Width	Depth	Height	145 x	80 x	230	<table border="1"> <thead> <tr> <th>Order no.</th> </tr> </thead> <tbody> <tr> <td>78-4R</td> </tr> </tbody> </table>	Order no.	78-4R								
Width	Depth	Height																		
145 x	80 x	230																		
Order no.																				
78-4R																				
Balancer swivel arm		<p>Technical data</p> <p>Swivel arm for balancer with inserted slides. For mounting to front or side of vertical profile</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>630 x</td> <td>18 x</td> <td>35</td> </tr> </tbody> </table>	Width	Depth	Height	630 x	18 x	35	<table border="1"> <thead> <tr> <th>Order no.</th> </tr> </thead> <tbody> <tr> <td>78-4S</td> </tr> </tbody> </table>	Order no.	78-4S								
Width	Depth	Height																		
630 x	18 x	35																		
Order no.																				
78-4S																				
Vertical stand		<p>Technical data</p> <p>Vertical stand, rotation and height-adjustable, for installation on InForm system tables, with anti-slip edge. Height adjustment range: from 370 to 580 mm.</p> <p>Vertical stand. Colour: grey Vertical stand, beech look Required vertical profile (see page 30)</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td>430 x</td> <td>350 x</td> <td>30</td> </tr> <tr> <td>430 x</td> <td>350 x</td> <td>30</td> </tr> <tr> <td>34 x</td> <td>123 x</td> <td>480</td> </tr> </tbody> </table>	Width	Depth	Height	430 x	350 x	30	430 x	350 x	30	34 x	123 x	480	<table border="1"> <thead> <tr> <th>Order no.</th> </tr> </thead> <tbody> <tr> <td>78-3S</td> </tr> <tr> <td>78-3SZbu</td> </tr> <tr> <td>78-2DZ1St.</td> </tr> </tbody> </table>	Order no.	78-3S	78-3SZbu	78-2DZ1St.
Width	Depth	Height																		
430 x	350 x	30																		
430 x	350 x	30																		
34 x	123 x	480																		
Order no.																				
78-3S																				
78-3SZbu																				
78-2DZ1St.																				
Bookend set		<p>Technical data</p> <p>Book support set, 2-part, made of steel plate, light grey powder coated, suitable for InForm function shelving. Continuously adjustable horizontal displacement. Prevents the tipping over of books, catalogues or also measuring devices.</p>	<table border="1"> <thead> <tr> <th>Width</th> <th>Depth</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td></td> <td>296 x</td> <td>201</td> </tr> </tbody> </table> <p>Dimensions in mm</p>	Width	Depth	Height		296 x	201	<table border="1"> <thead> <tr> <th>Order no.</th> </tr> </thead> <tbody> <tr> <td>75-6P</td> </tr> </tbody> </table>	Order no.	75-6P								
Width	Depth	Height																		
	296 x	201																		
Order no.																				
75-6P																				

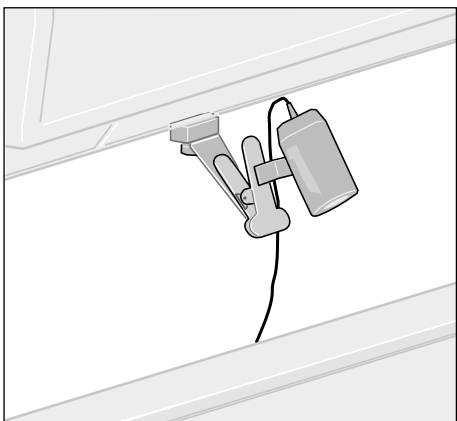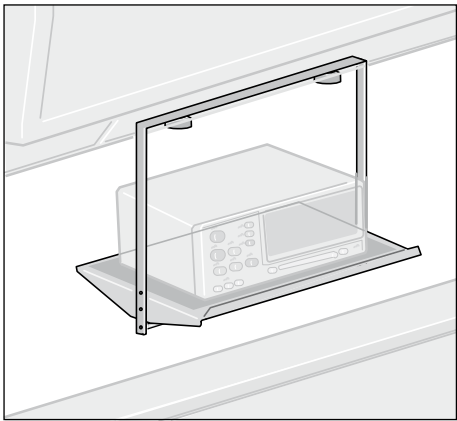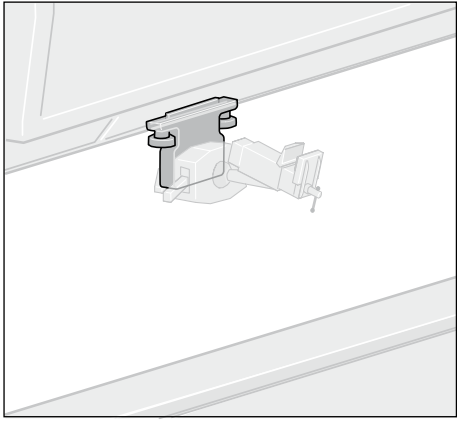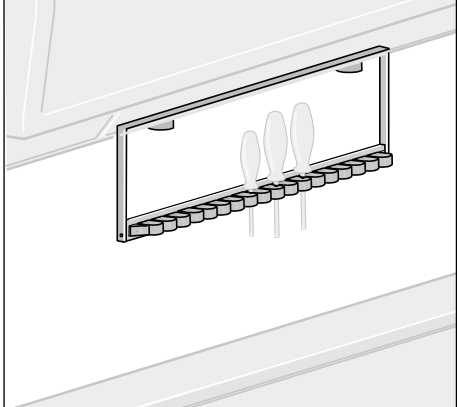Clamp lamp		<p>Technical data</p> <p>Work station lamp, continuously adjustable, inc. illuminant 60 W R40 E27. Can be mounted to the InForm terminal, the InForm cable duct, the vertical profile or to functional shelves, with clamping device for schematic diagrams.</p>	<p>Width Depth Height</p>	<p>Order no.</p> <p>75-1Q</p>
Measurement device platform		<p>Technical data</p> <p>Measurement device platform with swivelling shelf made of powder coated steel plate with anti-slip coating; can be continuously moved horizontally. Can be mounted below the terminal or the power supply duct.</p>	<p>Width Depth Height</p> <p>380 x 290 x 255</p>	<p>Order no.</p> <p>76-1DZ01</p>
Clamp flange		<p>Technical data</p> <p>Movable clamp flange made of plastic. Ideal third hand fitting in combination with a clamping vice. Can be mounted beneath the InForm terminal or on the face end or side of the vertical profile.</p>	<p>Width Depth Height</p> <p>144 x 21 x 88</p>	<p>Order no.</p> <p>78-3EZ01</p>
Tool holder		<p>Technical data</p> <p>Tool holder with 19 spring clips for storing tools quickly and close to hand. A tool holder, which can be moved continuously horizontally, can be mounted beneath the terminal or the power supply duct.</p>	<p>Width Depth Height</p> <p>450 x 155 x 55</p> <p>Dimensions in mm</p>	<p>Order no.</p> <p>81-8PZ01</p>

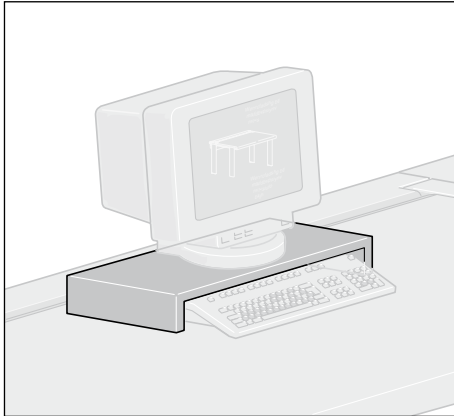Keyboard garage




Technical data

Keyboard garage made of 19 mm coated chipboard. Suitable for elevated placement of monitors while at the same time providing keyboard support.

Colour: light grey.

Width	Depth	Height	Order no.
570	300	140	85-4E

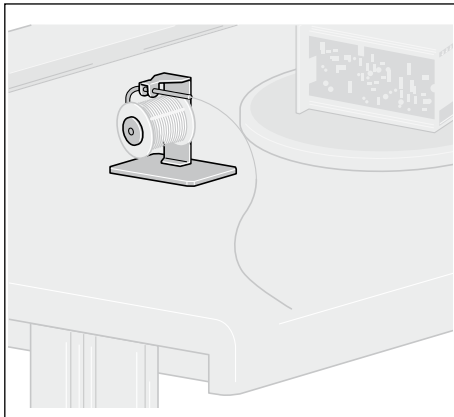Solder unwinder



Technical data

Solder unwinder for rolls of up to 1 kg with adjustable axis diameter (8 and 12 mm)

Width	Depth	Height	Order no.
100	145	115	78-4F

Dimensions in mm